



Features

- Low maintenance sealed unit
- Gel filled reference cell
- BNC connection with Boot plastic Cover
- Cable length 6 meter
- Pellon Diaphragm high accuracy


Field Application:

- General laboratory
- Drinking Water
- Swimming pools
- Water monitoring and control plan

Code: 9900105097

- Features:
 - o Range: ± 1000 mV,
 - o Temperature: 0 - 60 °C,
 - o Pressure: 6 Bar
 - o Trasparten plastic Body
 - o **Single junction** with KCL Gel and **Pellon diaphragm**.
 - o YELLOW cup with **6 meter cable** size 3mm, BNC plug included with yellow Boot cup.
 - o Batch production with 4 number to indicate Week and Year production.
 - o Single Package with neutral carton box.
 - o Neutral Label.

Dimensions

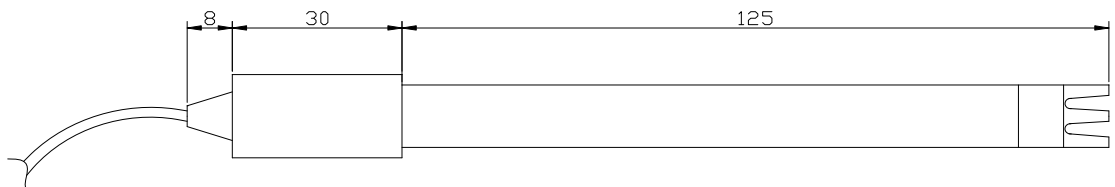

Technical characteristics

ORP Range:	± 1000 mV
Temp. Range:	60° C
Pressure Range:	up to 6 bar
Body material:	Polycarbonate
Diaphragm type:	Pellon
Mechanical Mounting:	Ø 12
Electrical Connection:	6 m cable + BNC (yellow BOOT Cup)
Reference:	GEL
Offset	± 12 mV
Storage temperature	+2 ÷ 50 °C (do not freeze)